


160NF0-0G

Industrial Grade

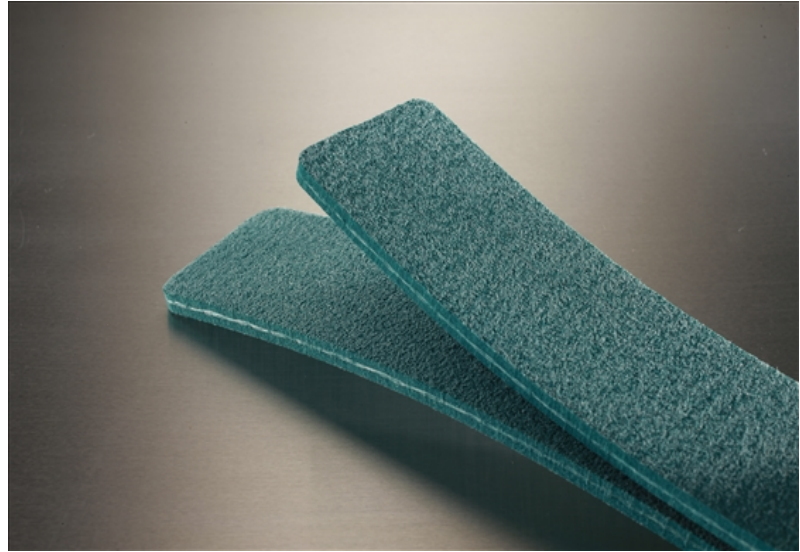

Cover

Top Color	Blue/Green
Thickness	
Material	Rubber Impregnation
Pattern	N/A
Durometer	

Carcass

Plies	1
Fabric	Needled Polyester
Anti-static	No
Laterally Rigid	No
Pulley Side Material	Needled Polyester

Weight

0.067 lbs./in.-ft. (3.9 kg/m²)

Maximum Width

78.75" (2m)

Overall Thickness

0.217" (5.5mm)

Minimum Pulley at 70°F

Min Pulley <180°	4" (101.6mm)
Min Pulley Reverse Bend	4" (101.6mm)

Contact Temperature Range

32°F to 248°F (0°C to 120°C)	
Intermittent	Contact Mol Belting

Working Tension

Minimum	4-32 lbs./in. (0.7-5.6 N/mm)
Maximum	155 lbs./in. (27.1 N/mm)

Elongation

0.4% @ 4 lbs./in. (0.7 N/mm)
0.7% @ 32 lbs./in. (5.6 N/mm)
2% @ 155 lbs./in. (27.1 N/mm)

Coefficient of Friction

Mild Steel	0.25
S/S	0.27
UHMW	0.2

Splicing/Lacing Methods

Splicing	Angle Skive Splice
Lacing #1	Unibar #2
Lacing #2	Alligator #7

Characteristics

FDA	No
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Good
Incline Conveying	No
Trough Conveying	No
Swan Neck Conveying	Fair
Metal Detectors	Contact Mol Belting
(Dependent on Sensitivity)	
Chemical Resistance	See Chart

Accessories

Edgecap	No
Guide	Yes
Cleats	No
Sidewall	No
Profile	No