


1H6-9G-PT

Industrial Grade

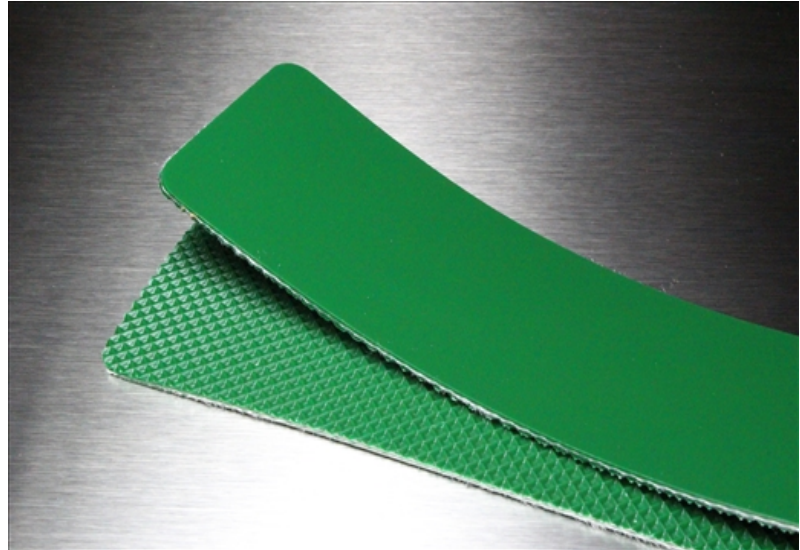

Cover

Top Color	Green
Thickness	0.024" (0.6mm)
Material	PVC
Pattern	Glossy
Durometer	80 A

Carcass

Plies	1
Fabric	Interwoven Polyester
Anti-static	No
Laterally Rigid	No
Pulley Side Material	PVC

Weight

0.038 lbs./in.-ft. (2.2 kg/m²)

Maximum Width

78.75" (2m)

Overall Thickness

0.079" (2mm)

Minimum Pulley at 70°F

Min Pulley <180°	1.375" (34.9mm)
Min Pulley Reverse Bend	2" (50.8mm)

Contact Temperature Range

5°F to 180°F (-15°C to 82°C)	
Intermittent	Contact Mol Belting

Working Tension

Minimum	23-34 lbs./in. (4-6 N/mm)
Maximum	90 lbs./in. (15.8 N/mm)

Elongation

0.4% @ 23 lbs./in. (4 N/mm)
0.7% @ 34 lbs./in. (6 N/mm)
2% @ 90 lbs./in. (15.8 N/mm)

Coefficient of Friction

Mild Steel	0.3
S/S	0.32
UHMW	0.25

Splicing/Lacing Methods

Splicing	Finger Splice
Lacing #1	Unibar #1 SP
Lacing #2	Alligator #7

Characteristics

FDA	No
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Fair
Incline Conveying	No
Trough Conveying	No
Swan Neck Conveying	Poor
Metal Detectors	Contact Mol Belting
(Dependent on Sensitivity)	
Chemical Resistance	See Chart

Accessories

Edgecap	Yes
Guide	Yes
Cleats	Yes
Sidewall	Yes
Profile	Contact Mol Belting