


2AH2-0W-U

Food Grade

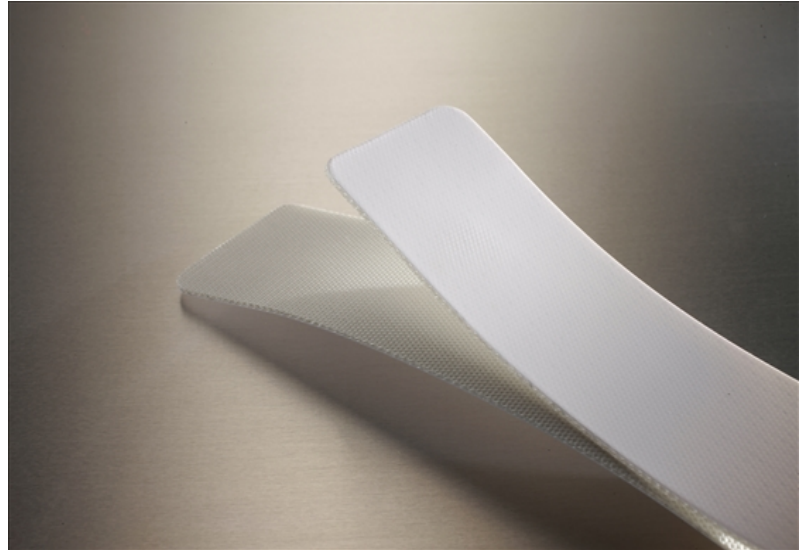

Cover

Top Color	White
Thickness	0.008" (0.2mm)
Material	TPU – Extruded
Pattern	Glossy
Durometer	86 A

Carcass

Plies	2
Fabric	Polyester with PU Impregnation
Anti-static	Yes
Laterally Rigid	No
Pulley Side Material	Polyester

Weight

0.024 lbs./in.-ft. (1.4 kg/m²)

Maximum Width

118.1" (3m)

Overall Thickness

0.051" (1.3mm)

Minimum Pulley at 70°F

Min Pulley <180°	0.75" (19mm)
Min Pulley Reverse Bend	2" (50.8mm)

Contact Temperature Range

-22°F to 175°F (-30°C to 79°C)

Intermittent	Contact Mol Belting
--------------	---------------------

Working Tension

Minimum	34-63 lbs./in. (6-11 N/mm)
Maximum	114 lbs./in. (20 N/mm)

Elongation

0.4% @ 34 lbs./in. (6 N/mm)
0.7% @ 63 lbs./in. (11 N/mm)
2% @ 114 lbs./in. (20 N/mm)

Coefficient of Friction

Mild Steel	0.22
S/S	0.24
UHMW	0.17

Splicing/Lacing Methods

Splicing	Finger Splice
Lacing #1	Unibar #36 ESP
Lacing #2	Alligator #00

Characteristics

FDA	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Fair
Incline Conveying	No
Trough Conveying	Yes
Swan Neck Conveying	Fair
Metal Detectors	Contact Mol Belting
(Dependent on Sensitivity)	
Chemical Resistance	See Chart

Accessories

Edgecap	No
Guide	Yes
Cleats	Yes
Sidewall	No
Profile	Contact Mol Belting