


# 2AR6-0BU-U-TT

## Food Grade

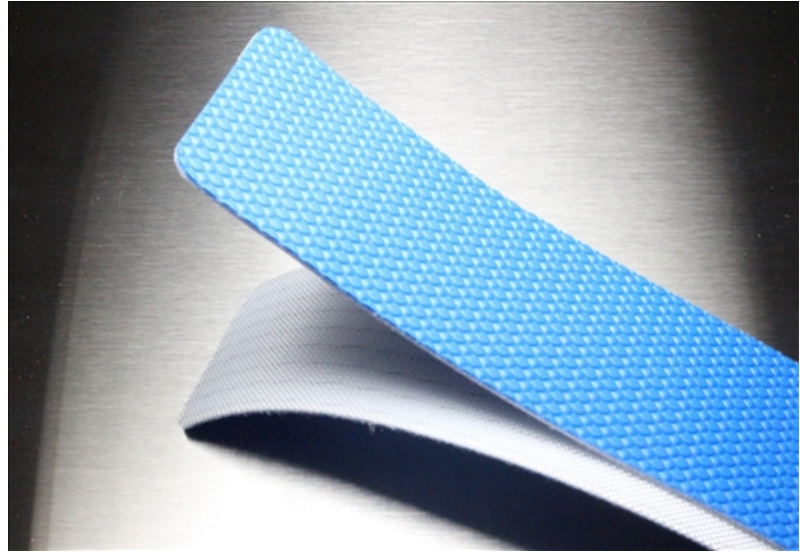

### Cover

Top Color	Blue
Thickness	0.02" (0.5mm)
Material	TPU
Pattern	Texture Top
Durometer	86 A

### Carcass

Plies	2
Fabric	Polyester
Anti-static	Yes
Laterally Rigid	Yes
Pulley Side Material	Polyester with PU Impregnation

### Weight

0.031 lbs./in.-ft. (1.8 kg/m<sup>2</sup>)

### Maximum Width

90" (2.3m)

### Overall Thickness

0.071" (1.8mm)

### Minimum Pulley at 70°F

Min Pulley <180°	1" (25.4mm)
Min Pulley Reverse Bend	2" (50.8mm)

### Contact Temperature Range

-4°F to 176°F (-20°C to 80°C)	
Intermittent	Contact Mol Belting

### Working Tension

Minimum	23-34 lbs./in. (4-6 N/mm)
Maximum	90 lbs./in. (15.8 N/mm)

### Elongation

0.4% @ 23 lbs./in. (4 N/mm)
0.7% @ 34 lbs./in. (6 N/mm)
2% @ 90 lbs./in. (15.8 N/mm)

### Coefficient of Friction

Mild Steel	0.22
S/S	0.24
UHMW	0.17

### Splicing/Lacing Methods

Splicing	Finger Splice
Lacing #1	Unibar #36 SP
Lacing #2	

### Characteristics

FDA	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Excellent
Incline Conveying	Yes
Trough Conveying	No
Swan Neck Conveying	Good
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

### Accessories

Edgecap	No
Guide	Yes
Cleats	No
Sidewall	No
Profile	No