


# 2AW10-OBL-LR-FR

## Industrial Grade

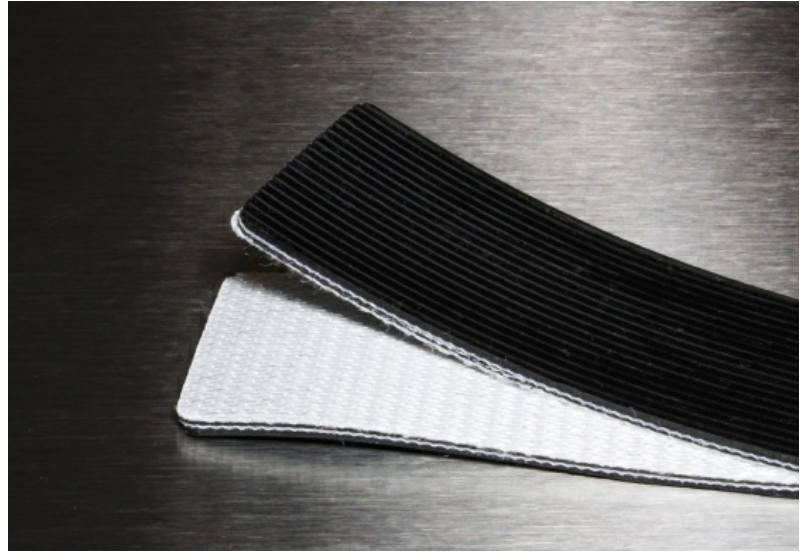

### Cover

Top Color	Black
Thickness	0.039" (1mm)
Material	PVC
Pattern	Longitudinal Ridge
Durometer	35 A

### Carcass

Plies	2
Fabric	Polyester
Anti-static	Yes
Laterally Rigid	Yes
Pulley Side Material	Polyester Whisper

### Weight

0.034 lbs./in.-ft. (2 kg/m<sup>2</sup>)

### Maximum Width

78.75" (2m)

### Overall Thickness

0.106" (2.7mm)

### Minimum Pulley at 70°F

Min Pulley <180°	1.5" (38.1mm)
Min Pulley Reverse Bend	2.5" (63.5mm)

### Contact Temperature Range

5°F to 210°F (-15°C to 99°C)

Intermittent Contact Mol Belting

### Working Tension

Minimum	34-57 lbs./in. (6-10 N/mm)
Maximum	150 lbs./in. (26.3 N/mm)

### Elongation

0.4% @ 34 lbs./in. (6 N/mm)  
 0.7% @ 57 lbs./in. (10 N/mm)  
 2% @ 150 lbs./in. (26.3 N/mm)

### Coefficient of Friction

Mild Steel	0.25
S/S	0.27
UHMW	0.2

### Splicing/Lacing Methods

Splicing	Finger Step Finger Splice
Lacing #1	Unibar #1 SP
Lacing #2	Alligator #1

### Characteristics

FDA	No
Non-Marking	Yes
Flame Retardant	Yes
Release Characteristics	Fair
Incline Conveying	Yes
Trough Conveying	No
Swan Neck Conveying	Fair
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

### Accessories

Edgecap	Yes
Guide	Yes
Cleats	Yes
Sidewall	No
Profile	No