


2BU200-XNBR-RT

Industrial Grade

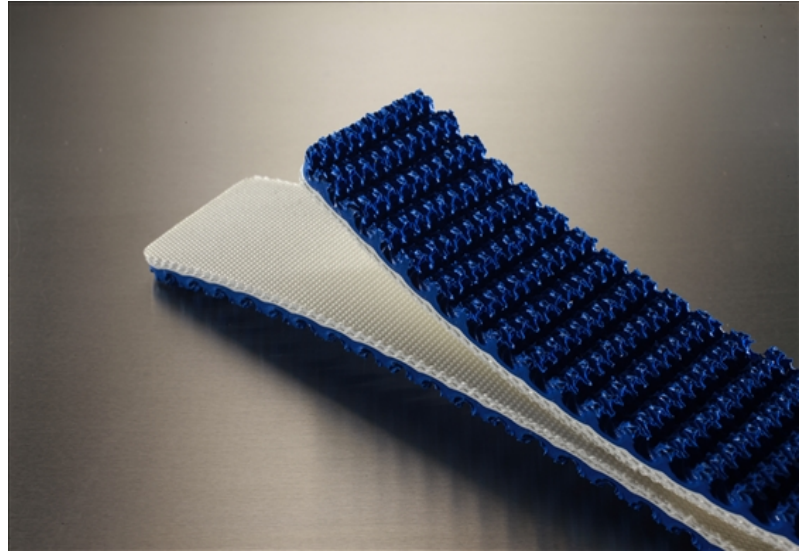

Cover

Top Color	Dark Blue
Thickness	0.175" (4.4mm)
Material	Carboxylated Nitrile
Pattern	Rough Top
Durometer	

Carcass

Plies	2
Fabric	Polyester
Anti-static	No
Laterally Rigid	No
Pulley Side Material	Polyester

Weight

0.11 lbs./in.-ft. (6.5 kg/m²)

Maximum Width

72" (1.8m)

Overall Thickness

0.256" (6.5mm)

Minimum Pulley at 70°F

Min Pulley <180°	2" (50.8mm)
Min Pulley Reverse Bend	4" (101.6mm)

Contact Temperature Range

32°F to 212°F (0°C to 100°C)

Intermittent	Contact Mol Belting
--------------	---------------------

Working Tension

Minimum	42-70 lbs./in. (7.4-12.3 N/mm)
Maximum	200 lbs./in. (35 N/mm)

Elongation

0.4% @ 42 lbs./in. (7.4 N/mm)
0.7% @ 70 lbs./in. (12.3 N/mm)
2% @ 200 lbs./in. (35 N/mm)

Coefficient of Friction

Mild Steel	0.3
S/S	0.32
UHMW	0.25

Splicing/Lacing Methods

Splicing	Angle Skive Splice
Lacing #1	Unibar #1 SP
Lacing #2	Alligator #7

Characteristics

FDA	No
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Good
Incline Conveying	Yes
Trough Conveying	No
Swan Neck Conveying	Fair
Metal Detectors	Contact Mol Belting
(Dependent on Sensitivity)	
Chemical Resistance	See Chart

Accessories

Edgecap	No
Guide	Yes
Cleats	No
Sidewall	No
Profile	No