


2G200-NITRILE-TT

Industrial Grade

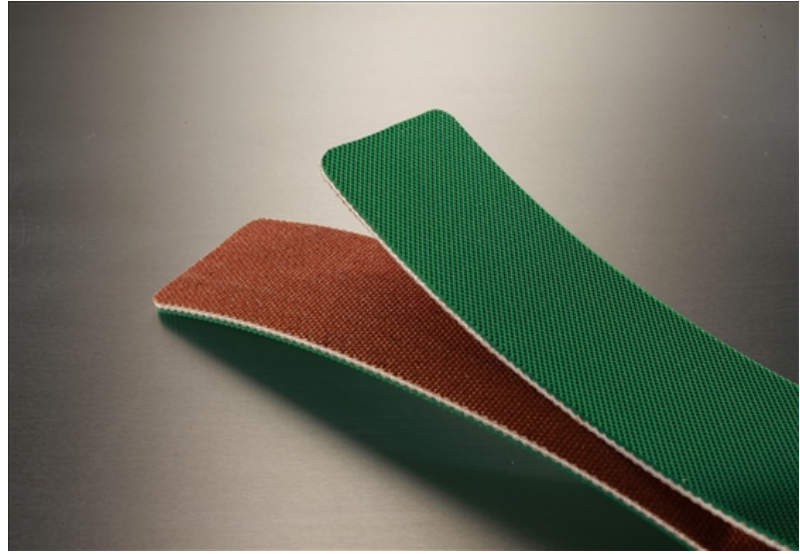

Cover

Top Color	Green
Thickness	0.039" (1mm)
Material	Nitrile Rubber
Pattern	Mini-texture Top
Durometer	

Carcass

Plies	2
Fabric	Polyester
Anti-static	No
Laterally Rigid	Yes
Pulley Side Material	Polyester

Weight

0.052 lbs./in.-ft. (3 kg/m²)

Maximum Width

72" (1.8m)

Overall Thickness

0.101" (2.6mm)

Minimum Pulley at 70°F

Min Pulley <180°	1" (25.4mm)
Min Pulley Reverse Bend	1" (25.4mm)

Contact Temperature Range

20°F to 250°F (-7°C to 121°C)	
Intermittent	Contact Mol Belting

Working Tension

Minimum	42-70 lbs./in. (7.4-12.3 N/mm)
Maximum	200 lbs./in. (35 N/mm)

Elongation

0.4% @ 42 lbs./in. (7.4 N/mm)
0.7% @ 70 lbs./in. (12.3 N/mm)
2% @ 200 lbs./in. (35 N/mm)

Coefficient of Friction

Mild Steel	0.3
S/S	0.32
UHMW	0.25

Splicing/Lacing Methods

Splicing	Finger Step Finger Splice
Lacing #1	Unibar #1 SP
Lacing #2	Alligator #1

Characteristics

FDA	No
Non-Marking	No
Flame Retardant	No
Release Characteristics	Good
Incline Conveying	No
Trough Conveying	No
Swan Neck Conveying	Fair
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

Accessories

Edgecap	No
Guide	Yes
Cleats	No
Sidewall	No
Profile	No