


2H15-1W-NV

Food Grade

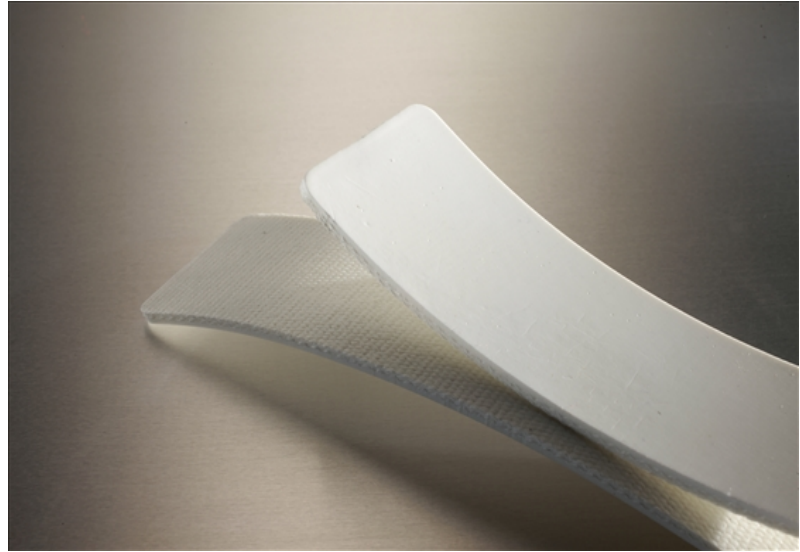

Cover

Top Color	White
Thickness	0.059" (1.5mm)
Material	Rubber Modified Vinyl
Pattern	Glossy
Durometer	75 A

Carcass

Plies	2
Fabric	Polyester
Anti-static	No
Laterally Rigid	No
Pulley Side Material	Friction Coat Polyester

Weight

0.062 lbs./in.-ft. (3.6 kg/m²)

Maximum Width

84" (2.1m)

Overall Thickness

0.116" (2.9mm)

Minimum Pulley at 70°F

Min Pulley <180°	2" (50.8mm)
Min Pulley Reverse Bend	3" (76.2mm)

Contact Temperature Range

0°F to 220°F (-18°C to 104°C)	
Intermittent	Contact Mol Belting

Working Tension

Minimum	29-40 lbs./in. (5.1-7 N/mm)
Maximum	100 lbs./in. (17.5 N/mm)

Elongation

0.4% @ 29 lbs./in. (5.1 N/mm)
0.7% @ 40 lbs./in. (7 N/mm)
2% @ 100 lbs./in. (17.5 N/mm)

Coefficient of Friction

Mild Steel	0.35
S/S	0.37
UHMW	0.3

Splicing/Lacing Methods

Splicing	Finger Step Finger Splice
Lacing #1	Unibar #1
Lacing #2	Alligator #1

Characteristics

FDA	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Fair
Incline Conveying	No
Trough Conveying	Yes
Swan Neck Conveying	Poor
Metal Detectors	Contact Mol Belting
(Dependent on Sensitivity)	
Chemical Resistance	See Chart

Accessories

Edgecap	Yes
Guide	Yes
Cleats	Yes
Sidewall	Yes
Profile	Contact Mol Belting