


# 3H15-1W-NV

## Food Grade

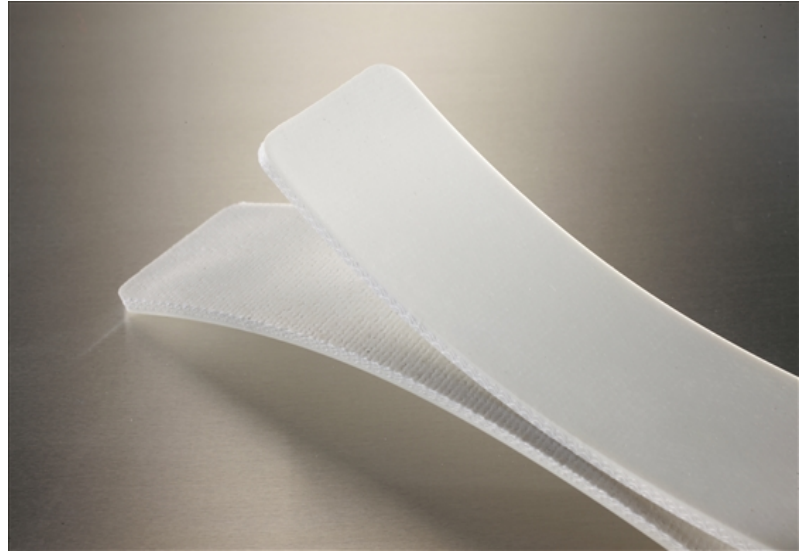

### Cover

Top Color	White
Thickness	0.059" (1.5mm)
Material	Rubber Modified Vinyl
Pattern	Glossy
Durometer	75 A

### Carcass

Plies	3
Fabric	Polyester
Anti-static	No
Laterally Rigid	No
Pulley Side Material	Friction Coat Polyester

### Weight

0.077 lbs./in.-ft. (4.5 kg/m<sup>2</sup>)

### Maximum Width

84" (2.1m)

### Overall Thickness

0.14" (3.6mm)

### Minimum Pulley at 70°F

Min Pulley <180°	3" (76.2mm)
Min Pulley Reverse Bend	4.5" (114.3mm)

### Contact Temperature Range

0°F to 220°F (-18°C to 104°C)	
Intermittent	Contact Mol Belting

### Working Tension

Minimum	34-57 lbs./in. (6-10 N/mm)
Maximum	150 lbs./in. (26.3 N/mm)

### Elongation

0.4% @ 34 lbs./in. (6 N/mm)
0.7% @ 57 lbs./in. (10 N/mm)
2% @ 150 lbs./in. (26.3 N/mm)

### Coefficient of Friction

Mild Steel	0.35
S/S	0.37
UHMW	0.3

### Splicing/Lacing Methods

Splicing	
Lacing #1	Unibar #1
Lacing #2	Alligator #1

### Characteristics

FDA	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Fair
Incline Conveying	No
Trough Conveying	Yes
Swan Neck Conveying	Poor
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

### Accessories

Edgecap	Yes
Guide	Yes
Cleats	Yes
Sidewall	Yes
Profile	Contact Mol Belting