


HBS-1AR4-0W-SP

No Catalog Without Data

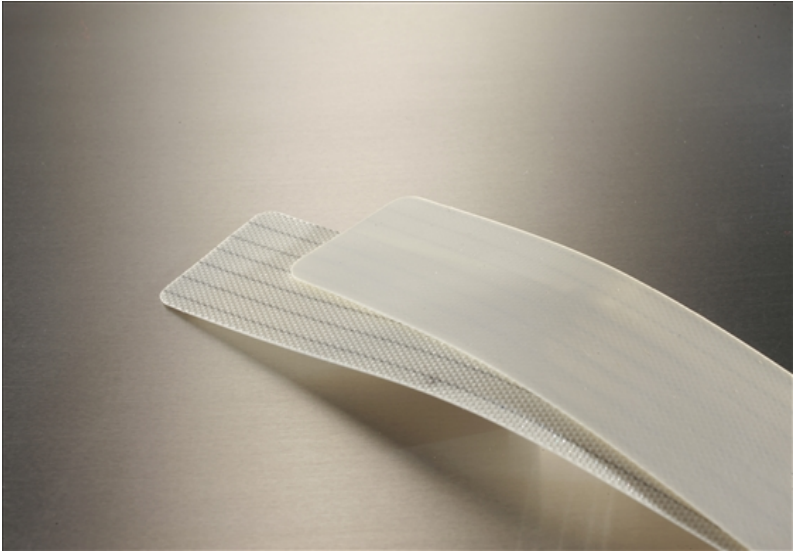

Top Color
Thickness
Material
Pattern
Durometer

Plies 0
Fabric
Anti-static No
Laterally Rigid
Pulley Side Material

0.016 lbs./in.-ft. (0.9 kg/m²)

Min Pulley <180°
Min Pulley Reverse Bend

Intermittent Contact Mol Belting
Minimum
Maximum

Mild Steel
S/S
UHMW

Splicing
Lacing #1
Lacing #2

FDA No
Non-Marking No
Flame Retardant No
Release Characteristics
Incline Conveying No
Trough Conveying No
Swan Neck Conveying
Metal Detectors Contact Mol Belting
(Dependent on Sensitivity)
Chemical Resistance See Chart

Edgecap No
Guide No
Cleats No
Sidewall No
Profile No