


2AKR2-0W-P0-SP

Food Grade

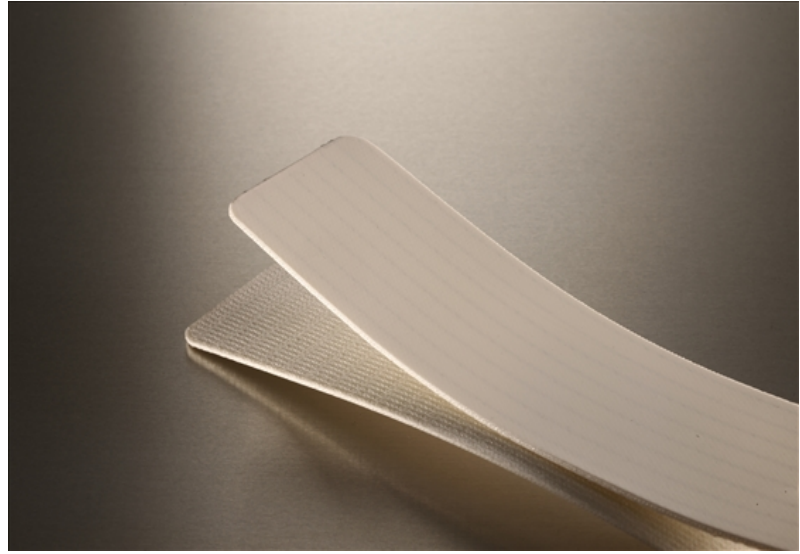

Cover

Top Color	White
Thickness	0.005" (0.1mm)
Material	Polyolefin
Pattern	Satin
Durometer	92 A

Carcass

Plies	2
Fabric	Polyester
Anti-static	Yes
Laterally Rigid	Yes
Pulley Side Material	Polyester

Weight

0.03 lbs./in.-ft. (1.8 kg/m²)

Maximum Width

120.875" (3.1m)

Overall Thickness

0.051" (1.3mm)

Minimum Pulley at 70°F

Min Pulley <180°	0.375" (9.5mm)
Min Pulley Reverse Bend	1" (25.4mm)

Contact Temperature Range

14°F to 140°F (-10°C to 60°C)	
Intermittent	Contact Mol Belting

Working Tension

Minimum	12-20 lbs./in. (2.1-3.5 N/mm)
Maximum	58 lbs./in. (10.2 N/mm)

Elongation

0.4% @ 12 lbs./in. (2.1 N/mm)
0.7% @ 20 lbs./in. (3.5 N/mm)
2% @ 58 lbs./in. (10.2 N/mm)

Coefficient of Friction

Mild Steel	0.22
S/S	0.24
UHMW	0.17

Splicing/Lacing Methods

Splicing	Finger Step Finger Splice
Lacing #1	Unibar #36 SP
Lacing #2	Alligator #00

Characteristics

FDA	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Excellent
Incline Conveying	No
Trough Conveying	No
Swan Neck Conveying	Good
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

Accessories

Edgecap	No
Guide	Yes
Cleats	No
Sidewall	No
Profile	No